

Mitsubishi Electric
starMEX
Air-Conditioner



for a greener tomorrow

Eco Changes is the Mitsubishi Electric Group's environmental statement, and expresses the Group's stance on environmental management. Through a wide range of businesses, we are helping contribute to the realization of a sustainable society.



MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BLDG. 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN

MITSUBISHI ELECTRIC ASIA PTE LTD

307 Alexandra Road, Mitsubishi Electric Building, Singapore 159943.

Tel: (65) 6473 2308 Fax: (65) 6476 0590, Office Hours: Monday - Friday 8.30am - 5.30pm

Show Room Opening Hours: Monday - Friday 8.30am - 5.30pm, Saturday & Sunday 10:00am - 6.00pm, Closed on Public Holidays

(Showroom) Tel: (65) 6470 2600. <http://www.MitsubishiElectric.com.sg>



New publication effective Nov. 2013. Specifications subject to change without notice. Due to printing consideration, the actual colors may vary slightly from those shown inside brochure.

MITSUBISHI ELECTRIC
Changes for the Better

Mitsubishi
MElectric
Quality



Product Award
Received 4 Star Super Award & 7 Star Award (Asia & Singapore)
2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010, 2011 & 2012

Mitsubishi Electric
starMEX
Air-Conditioner



The No.1 Specialist in Energy Saving

At the leading-edge of air conditioning technology

EXCELLENT Energy Savings

EASIEST To Clean!
Reachable Inner Vent for Easy Clean

QUIETEST 19dB

SAVE
R410A
OZONE

Inverter Series
Mr.SLIM
R410A



Manufacturer of the
World's First
Wall-Mounted
Split Air Conditioner*
*applying line flow fan

All Mitsubishi Electric Starmex Inverter Air Conditioners have attained "Excellent" energy efficiency rating under the Singapore Mandatory Energy Labelling Scheme.

Source: National Climate Change Committee website - <http://www.nccc.gov.sg>

Inverter Multi Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
MXY-3A28VA up to 3 indoor units			 MSY-GE10/13VA MSY-GE18VA  MSY-GE24/26VA	12	
MXY-4A28VA up to 4 indoor units				12	
MXY-4A38VA up to 4 indoor units				12	
MXY-2E20VA up to 2 indoor units *MXY-2E20VA can be connected to wall mount series only of up to cooling capacity of 3.5kW.			 MSY-GE10/13VA	12	
Inverter Multi Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
MXY-3A28VA up to 3 indoor units			 PLA-RP35/50/60/71BA	22	
MXY-4A38VA up to 4 indoor units			 MLZ-KA35/50VA	23	
Inverter Multi Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
MXY-3A28VA up to 3 indoor units			 SEZ-KD35/50/60/71VAL	25	
MXY-4A38VA up to 4 indoor units			 SEZ-KD35/50/60/71VAL	25	
			 PEAD-RP50/60/71JA(L) *PEAD-RP71JA(L) can be connected to MXY-4A38VA only. Total Indoor Running current must not exceed 3Amps when connecting to PEAD series.	24	

Conversion formula: Btu/h=kW X 3412

Inverter Multi Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
MXY-3A28VA up to 3 indoor units			 MSY-EF10/13/18VAW	20	
MXY-4A28VA up to 4 indoor units			 MSY-EF10/13/18VAS	20	
MXY-4A38VA up to 4 indoor units			 MSY-EF10/13/18VAB	20	
MXY-2E20VA up to 2 indoor units *MXY-2E20VA can be connected to wall mount series only of up to cooling capacity of 3.5kW.			 MSY-EF10/13VAW Silver & Black also available	20	
Inverter Single Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
MUY-GE10VA			 MSY-GE10VA	12	
MUY-GE13VA			 MSY-GE13VA	12	
MUY-GE15VA			 MSY-GE15VA	12	
MUY-GE18VA			 MSY-GE18VA	12	
MUY-GE24VA			 MSY-GE24VA	12	


Conversion formula: Btu/h=kW X 3412

Mr.Slim Inverter Single Split	Type		Connectable Indoor Units	Page	Energy labelling scheme
	Model	Refrigerant			
SUY-KA18VA 	 		PLY-P18BA 	26	
			PCY-P18KA 	27	
			PEY-P18JA 	28	
SUY-KA24VA 	 		PLY-P24BA 	26	
			PCY-P24KA 	27	
			PEY-P24JA 	28	
SUY-KA30VA 	 		PLY-P30BA 	26	
			PCY-P30KA 	27	
			PEY-P30JA 	28	
SUY-KA36VA 	 		PLY-P36BA 	26	
			PCY-P36KA 	27	
			PEY-P36JA 	28	

Conversion formula: Btu/h=kw X 3412

Your Life, Our Technology – The Comfort Connection.

As everyone knows, nothing compares to the comfort that nature has to provide. However, thanks to its many technical refinements, Mitsubishi Electric's air conditioners bring you closer to this ideal. Improved EER (Energy Efficiency Ratio) levels significantly reduce energy consumption while extremely quiet operation and the use of the Eco-friendly R410A refrigerant allow our series to create a naturally serene environment in every room of the house.

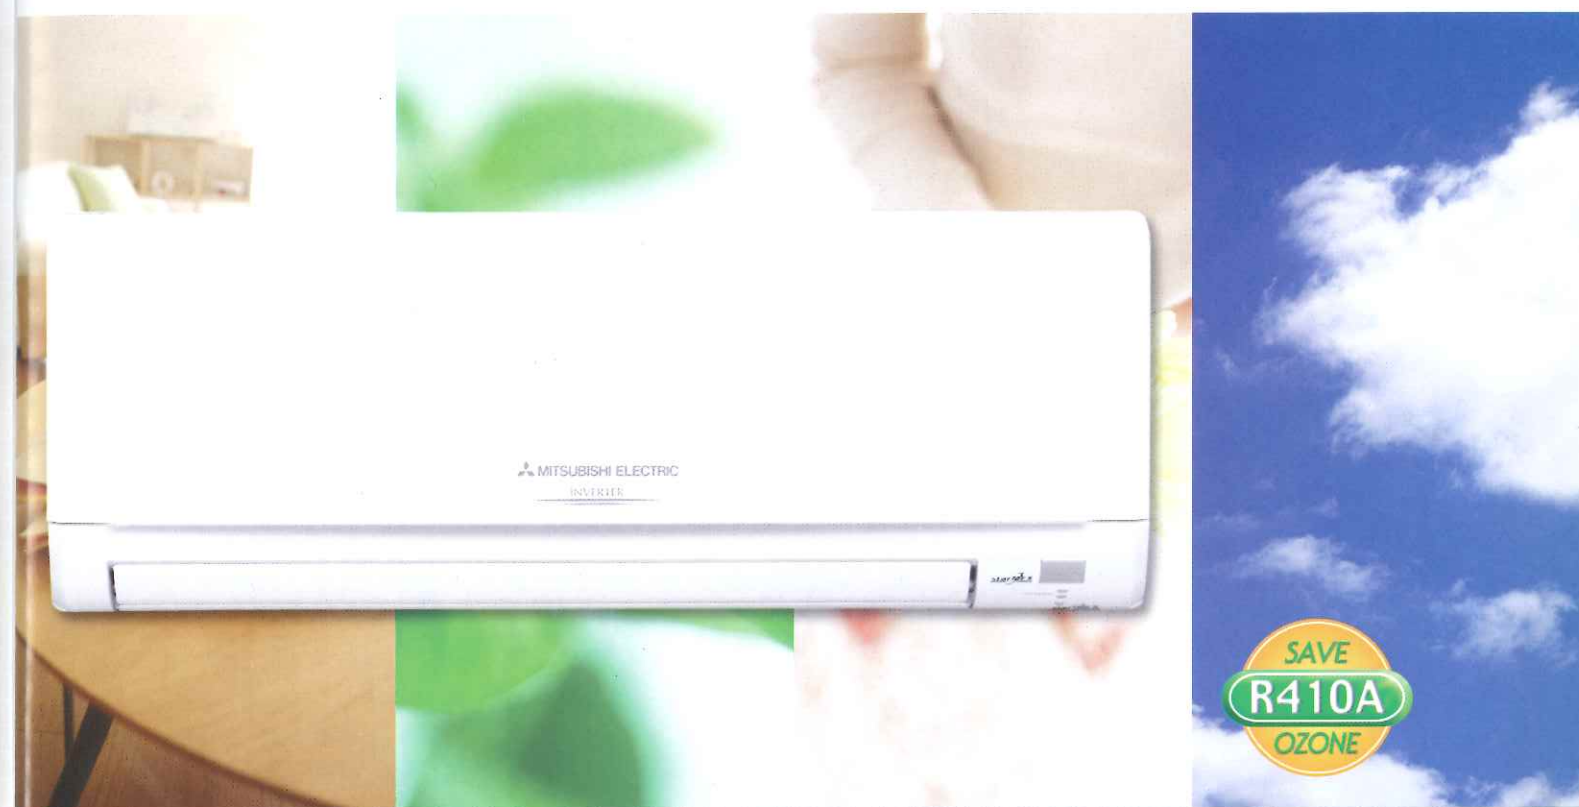


Technology and quality make the difference.

To create a better product that is friendly to both you and the environment, Mitsubishi Electric now utilises a new type of refrigerant called R410A. With an ozone depletion potential factor of zero, exceptionally non-toxicity, and chemically stable nonflammability, this refrigerant exemplifies the quality that our air conditioners have to offer.

EASY CLEAN

 Safety system stops the machine when the horizontal vane is removed.

THE WIDE AIR OUTLET MAKES CLEANING EASY,
ALWAYS KEEPING THE AIR IN YOUR ROOM
CLEAN AND FRESH.

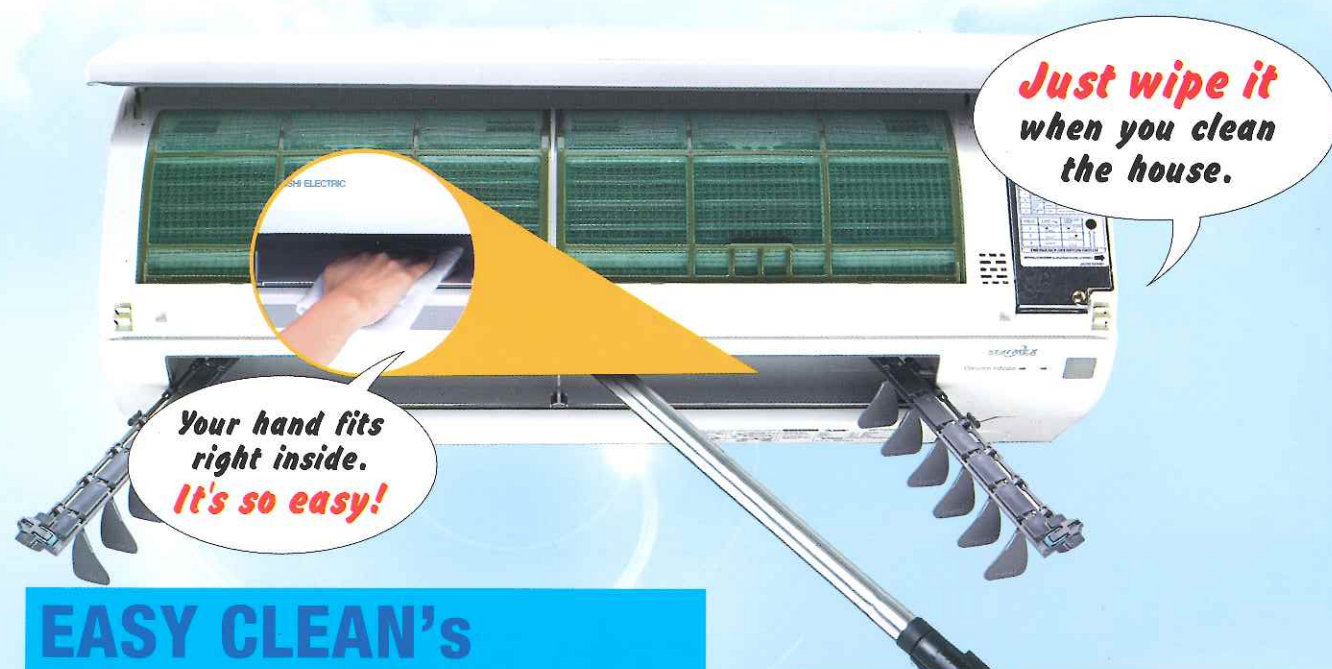

EASY CLEAN's unique cleaning system

Open the blower outlet for cleaning



The entire front panel can be washed



Easy removal

Scrub clean

Thorough cleaning keeps your home healthier and more comfortable.

Eliminates odours

Always bringing you fresh air

Prevents mould

The mould guard (internal drier) always keeps the inside unit clean

Longer lasting high performance

Consistent performance from time of purchase

Economical energy costs

Cleaning the fan (25%), the heat exchanger (5%) and the filter (15%) increases energy savings by a total of up to 45%!

Mitsubishi Electric's Main Technology

Cleaning-Free, Pipe Reuse Technology

It is a fact that the world's ozone layer is being depleted.

Many scientists believe that refrigerants that contain hydrochlorofluorocarbons such as HCFC-R22 with chlorine are a contributing factor to this problem. R410A – a chlorine-free, non-inflammable, environmentally friendly and energy efficient refrigerant offers a new alternative. In addition to the properties just mentioned, R410A is as easy to handle as the environmentally unfriendly R22 because of its pseudoazeotropic characteristics.

R410A is also highly efficient and provides the same level of performance as R22.



NEW REFRIGERANT
R410A

CURRENT REFRIGERANT
R22

Non-uniform boiling point composite refrigerant
(HFC:R32/R125=50:50WT%)

Single component refrigerant
(HCFC:R22=100WT%)

Ozone depletion potential factor*
0

Toxicity
NON

Stability
GOOD

0.05

NON

GOOD

* Relative value when CFC is considered as 1

Mitsubishi Electric's Cleaning-Free Technology

Our R410A Inverter-driven models are the first in the industry to use hard alkyl benzene (HAB) oil — a unique refrigerant oil that degrades very slowly — for refrigeration. Employing our exclusive cleaning-free technologies such as a specially developed high-efficiency oil separator and optimum distribution of heat exchangers to prevent oil stagnation, we have made it possible to reuse previously installed R22 pipeworks.



ORIGINAL HAB Oil

- No special cleaning required
- Re-use existing pipes
- Cleaning / Purging process
- Special tools (Oil trap kit)
- Higher working pressure

ORDINARY ESTER Oil

- Formation of Sludge
- Clogging
- Premature breakdown of equipment
- Strip and replace existing R22 pipes

Mitsubishi Electric's original HAB oil



Ordinary ester oil



Refrigerant circuit lasts longer with less deterioration using the new HAB refrigerant oil.*

*Data taken from our lab: Test results equivalent to 10 years worth of use

1st in the Industry!

QUESTION: In general, why is the reuse of existing R22 pipeworknot allowed for models with R410A HFC refrigerant?

ANSWER: This is because existing R22 pipework contains moisture and chloride residue that, when mixed with compressor's ester oil, can result in a chemical reaction. Additionally, refrigerant oil sludge and corrosion within the compressor can clog up the refrigerant circuit.

MITSUBISHI ELECTRIC'S SOLUTION: FLUSH, VACUUM & INSTALL!

Mitsubishi Electric's exclusive cleaning-free, Pipe-reuse technology allows you to reuse existing R22 refrigeration piping even when installing a new R410A model.

Mitsubishi Electric's Main Technology

Easy, Clean & Comfortable

EASYCLEAN Easy Clean Design

The easily detachable panel is a snap to wash and the airflow vents can be opened without any special tools for quick cleaning of the inside of the air conditioner. It is recommended that the air conditioner be cleaned regularly as this will increase both operating efficiency and energy-savings. Always clean the heat exchanger, fan and air vent to ensure proper performance and economical operation. It reduces your electricity bill by approx. 45%*.

*Electricity bill comparison of operation under fixed temperature with 8 grams of soil on the fan and one without. Based on internal company data.



Electrostatic Anti-Allergy Enzyme Filter


The filter is charged with static electricity, enable it to trap allergens such as molds and bacteria and decompose them using enzymes retained in the filter.

Anti-Allergy Enzyme Filter

To counter allergens, we have added filters featuring artificial blue enzymes with the power to remove harmful microbes such as bacteria^{*1}, virus^{*2}, dust mites^{*3}, pollen^{*3}, etc.

The enzymes destroy any germs caught in the filter, preventing them from working their way further inside the air conditioner. However, being artificial enzymes, they prevent allergies while remaining gentle on the human body.

(Confirmed by *1 Japan Spinners Inspecting Foundation test No. 007715-1,2 *2 Japan Food Research Laboratories Ref. No.20491448-002 *3 Shinshu University)

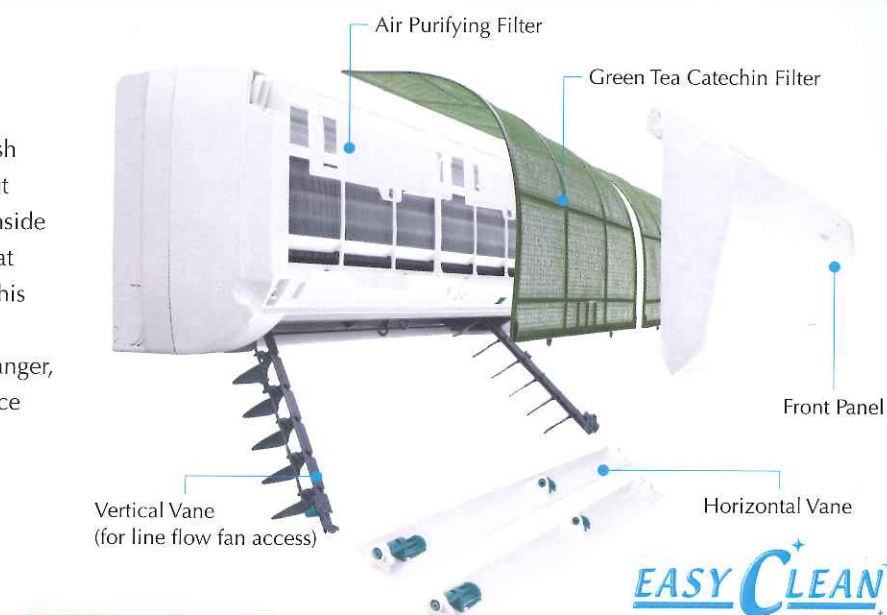


Easy Cleaning Procedure



1 First, turn off the power. Make sure the fan is not operating before this removal procedure. Unlock every green stopper of the upper horizontal vane and pull it towards the left to remove. Do the same thing to remove the lower horizontal vane. Safety system stops the blower when the horizontal vane is removed. 2 You can reach deep into the air conditioner, in order to clean fans and other parts that are normally hard-to-reach. 3 Hold the central green handle and pull towards body to open.

Anti-Allergy Enzyme filter mechanism

- 1 Artificial enzyme (meta-phthalocyanine) catalysts on the filament catch allergens.
- 2 The artificial enzyme catalysts aid the chemical reaction with oxygen and sever the S-S bonds.
- 3 Once the S-S bonds are severed, the proteins no longer act as allergens.

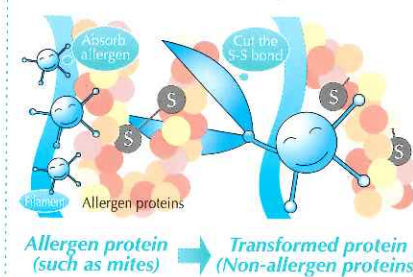

Catechin Plus Air Purifying System

The Catechin offers many benefits through its deodorizing, anti-bacterial and anti-virus properties. These benefits can be experienced fully with our long-lasting Hybrid Catechin Pre-filter. At the same time, dust collection efficiency is doubled with our Double Air Cleaning Filter.

The filter can be easily removed and when washed regularly, deodorizing effectiveness should last for more than 10 years.



Nano Platinum Nano Platinum Filter

The filter has a large capture area and incorporates nanometre-sized platinum-ceramic particles that work to kill bacteria and deodorise the circulating air. Better dust collection than conventional filters is also ensured.


Fuzzy Logic "I Feel"

Is the room too hot or cold, too dry or humid? On auto mode selection, the fuzzy logic control system adjusts conditions to suit you. Your selected temperature setting is stored in the memory system and reproduced automatically each time you operate your air conditioning.

Wide & Long Airflow

Bringing extra comfort to your life, left-right vane can be automatically controlled by remote controller. Simply use of Wide-vane mode, you can easily adjust direction of airflow to reach any corner of the room. The high-power motor combines with a newly designed "Long mode" to push air out further, providing an extended airflow that can reach the far end of long living rooms or reach the kitchen in open-concept living areas and studios.

When operating in Long mode, the airflow can be extended as far as 12m.

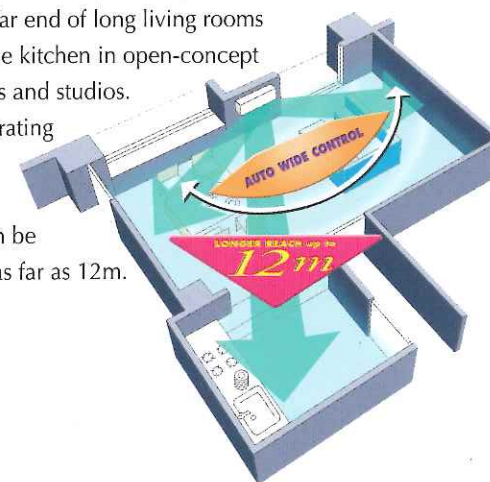

WIDE & LONG

Improved efficiency with 7-way airflow. Single area focus. Two separate areas simultaneously. Swing mode. By combining the use of the Wide-vane mode and Long and vane mode, you can adjust airflow horizontal 7 directions and vertical 6 directions. Exclusive to Mitsubishi Electric, this advantage ensures maximum control over air direction and flow up to 42 ways, which guarantee that the air conditioning effect isn't wasted, where it isn't needed.

Powerful Cool


The automatic, one-touch Powerful Cool system ensures faster cooling. It produces 10% more airflow than the "high fan" speed, cooling the room in less than 15 minutes, then automatically returning to the regular setting.

Auto Mode

We offer you an easy way to comfort with auto mode. "Auto vane" is created to set the vane angle automatically. "Auto fan" is created to adjust airflow speed automatically. These could let ideal temperature to be achieved in the shortest amount of time.

Anti-Rust Treatment

Every cabinet of the outdoor unit has been applied with a special anti-rust treatment.

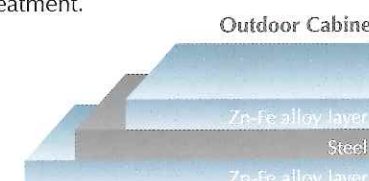

LCD Remote Control

From temperature and operation modes to air volume and direction, you'll be able to customise your environment at the touch of a button. Large, easy-to-identify buttons allow for easy access to frequently used functions. The generous LCD display lets you check temperature and other operating conditions at a glance, while an easy-open slide cover prevents inadvertent operation of preset controls and other functions.

Luminous Buttons


The remote controller features luminous buttons that make use easy even in the dark environment.



Inverter & Energy Saving Technology


Inverter Control Technology

By controlling current frequency according to the desired temperature setting and outside air-conditions, energy-efficient performance is assured. Frequency is lowered when less power is required to substantially reduce electricity consumption for more economical operation. Providing you with more economy and comfort throughout the year, inverter control presents an ideal situation as it reduces compressor rotation speed when air-conditioning load is low so it's like using a small compressor with a large heat-exchanger.

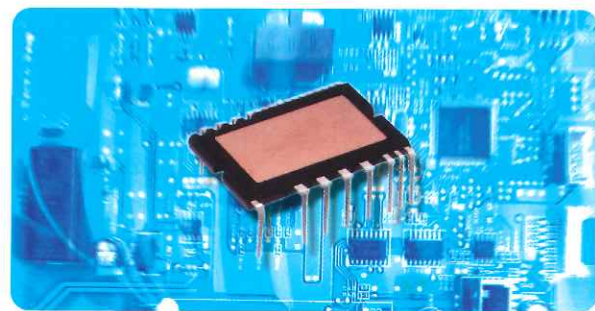


Optimum comfort year-round

To ensure that a room is never too cold or too hot, inverter technology allows the air conditioner to detect subtle fluctuations in room temperature and adjust automatically. Unlike conventional air conditioning units that must start or stop repetitively, inverter units offer finely tuned operation – such as the accurate control of compressor rotation – for a more comforting airflow and far less temperature variations.

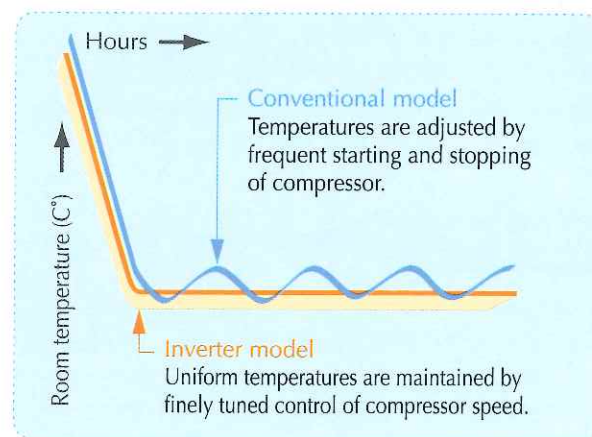


High-speed cooling

Our advanced Inverter technology enables efficient high-speed cooling by precisely and flexibly controlling the rotation of the compressor according to your cooling needs. For example, during summer months, the compressor speed is automatically set at a maximum level that is 30% faster than non-inverter models. So your room takes even less time to be cool.

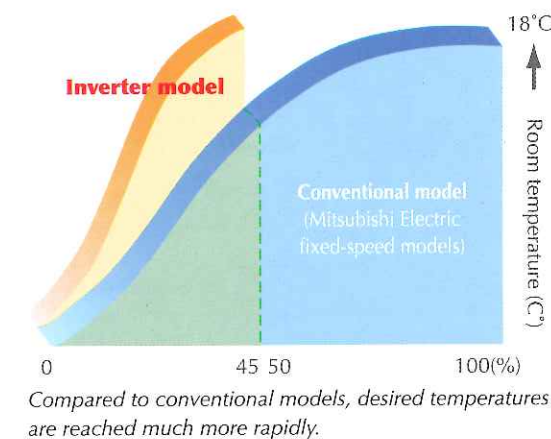

Econo Cool – smart save

The Econo Cool one touch operation automatically adjusts the direction of airflow based on the temperature at the air outlet. The set temperature can therefore be 2 °C above conventional temperature settings without loss of comfort and with a 20% increase in energy efficiency. Ensures greater comfort even when the temperature setting is 2 °C above conventional settings.

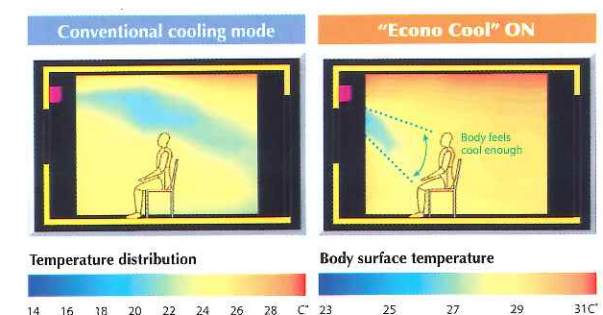

Ensures more comfort even when the set temperature is 2°C higher than the conventional cooling mode.

	Conventional	Econo Cool
Ambient temperature	35°C	35°C
Set temperature	25°C	27°C
Perceived temperature	30°C	29.3°C

NEW DC Inverter

DC Inverter

A high-efficiency DC motor drives the fan of the outdoor unit. It offers up to 60% greater efficiency than an equivalent AC motor.




Joint Wrap DC Motor

Mitsubishi Electric's newly developed, unique Joint Wrap Motor is environmentally friendly, using less copper wiring than conventional motors through the employment of joint wrap production techniques. This concentrated winding DC Motor (linked core type) features our original high density, concentrated winding technique for a reliable, highly efficient motor.




PAM (Pulse Amplitude Modulation)

Electricity can be used efficiently with less loss, the current wave resembles the supply voltage wave. PAM is a method for controlling the form of the current wave so that it conforms to the supply voltage wave. With PAM control, 98% of input power supply is effectively used.

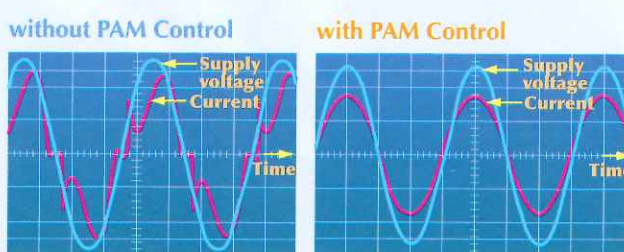

PAM adjusts the form of current wave so that it is close to that of the supply voltage wave. High harmonics are reduced and 98% of the electricity is utilized.


Using a Motorcycle as an Example

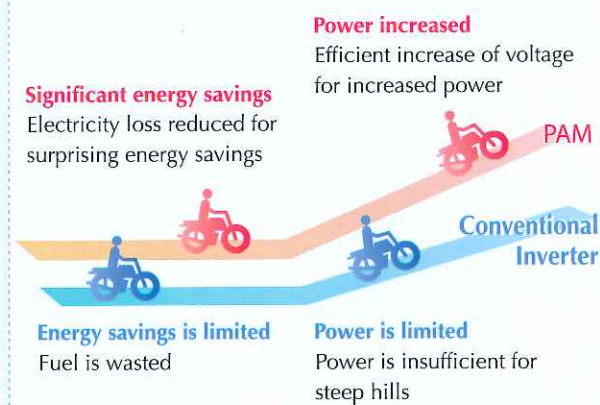

*This diagram illustrates the merits of PAM Control.

NEW LEV New LEV Control

LEV (Linear Expansion Valve) control automatically adjusts the volume of refrigerant flowing through the air conditioner according to air conditioning load. When the load is low, Needle A drops, restricting the flow path and decreasing the volume of refrigerant. In this simple yet effective concept, circulation of refrigerant is optimized to facilitate more economical operation.




Mitsubishi Electric's Main Technology

Silent Operation Technology & Multi-System

Only 19dB The Quietest Air Conditioner In The Market

Noise level during silent mode operation is only **19dB** for the MSY-GE10VA, making it the quietest indoor unit in the market. Inside the unit, the multi-angled heat exchanger has a modified fin shape that reduces air resistance for a smoother, quieter airflow. The wide fan diameter produces greater airflow at lower fan speeds and the uneven pitch between each fan blade helps to eliminate annoying noise. What's more, the remote controlled vane significantly decreases downward air resistance for much lower noise levels.


Super Quiet Operation
only **19dB**

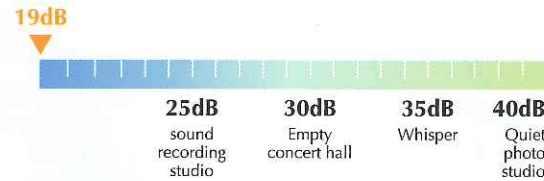

Twin Rotary Compressor Ensures Peace And Quiet

Unlike conventional models with a single rotary, all Inverter Multi Split System MXY Series outdoor units feature a twin-rotary compressor that provides balanced rotation as the centrifugal force of one roller is counterbalanced by the other. This significantly reduces both vibration and noise. This is why Mitsubishi Electric's outdoor units are so peacefully quiet.

Comparison of outdoor unit noise levels dB(A)	Outdoor unit	MXY-4A28VA	MUX-4BD26VB
Cooling		45	52

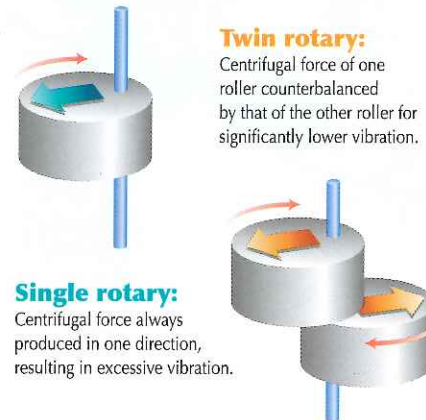

Multi-Split System The Convenient Way To Enhance Any Interior

Mitsubishi Electric Multi-split system could be the best solution balancing use of available space, exotic interior and money. With the system's innovative design, several indoor units could be mixed and matched and connected to a single outdoor unit as a customized system. It's your choice to add indoor units at any time more economically while facilitating installation.



Inverter Single Split System

SAVE R410A OZONE

Mitsubishi Electric **starMEX** Air-Conditioner

Our Inverter Technology adjusts capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.

MSY Series Indoor Unit



Dimensions (W x D x H): 798 x 232 x 295 mm

MSY-GE10VA	MSY-GE13VA
Cooling capacity: 2.5kW*	Cooling capacity: 3.5kW*
MSY-GE15VA	MSY-GE18VA
Cooling capacity: 4.2kW*	Cooling capacity: 4.8kW*



Dimensions (W x D x H): 1100 x 238 x 325 mm

MSY-GE24VA
Cooling capacity: 6.6kW*

Luminous Buttons

(MSY-GE24VA)

Outdoor Unit



MUY-GE10/13/15VA
Dimensions (W x D x H): 800 x 285 x 550 mm



MUY-GE18VA
Dimensions (W x D x H): 840 x 330 x 850 mm



MUY-GE24VA
Dimensions (W x D x H): 840 x 330 x 880 mm



Inverter Single Split system MSY series

Model		EASY CLEAN, WIDE & LONG				
Indoor		MSY-GE10VA	MSY-GE13VA	MSY-GE15VA	MSY-GE18VA	MSY-GE24VA
Outdoor		MUY-GE10VA	MUY-GE13VA	MUY-GE15VA	MUY-GE18VA	MUY-GE24VA
Function & type		Cooling, Wall-mounted				
Capacity (Min-Max)	kW	2.50 (1.1-3.5)	3.50 (1.4-3.9)	4.20 (0.9-4.8)	4.80 (1.4-5.4)	6.60 (2.4-8.7)
Total power input	kW	0.64	1.02	1.25	1.43	1.83
Starting current	A	3.30	4.70	5.70	6.40	8.20
Running current	A	3.30	4.70	5.70	6.40	8.20
Airflow (High)	CMM(m³/min)	11.4	12.8	14.2	15.1	20.7*
Dimension (W x D x H)	Indoor mm	798 X 232 X 295				
	Outdoor mm	800 X 285 X 550				
Net weight	Indoor kg	10	10	10	10	16
	Outdoor kg	30	30	36	54	53
Noise level (Silent - High)	Indoor dB(A)	19-40	19-45	26-48	28-49	30-53
Connection method	Indoor/Outdoor	Flared				
Dehumidification	l/h	0.30	0.80	1.20	1.60	1.80
External Diameter Piping	Gas (ø) mm	9.52	9.52	9.52	12.70	15.88
	Liquid (ø) mm	6.35	6.35	6.35	6.35	9.52
Max. length	m	20	20	20	30	30
	Max. height m	12	12	12	15	15
Power supply	V, Phase, Hz	230, 1, 50				
Energy labelling scheme						
		Excellent	Excellent	Excellent	Excellent	Excellent

*Note: Noise level is measured in anechoic chambers.
*Super high + long + powerful mode

Conversion formula: Btu/h=kW x 3412

Inverter Multi Split System

SAVE
R410A
OZONE

Mitsubishi Electric
star MEX
Air-Conditioners

Our Inverter Technology adjusts capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs. With capacity ranging from 2.5 kW to 7.1 kW, you can mix and match units to build a customized air conditioning system that is just right for your home. We are the Good Choice for comfortable living.



MXV Series Indoor Unit



Dimensions (W x D x H): 798 x 232 x 295 mm

Luminous Buttons

MSY-GE10VA
Cooling capacity: 2.5kW*

MSY-GE13VA
Cooling capacity: 3.5kW*

MSY-GE18VA
Cooling capacity: 5.0kW*



Dimensions (W x D x H): 1,100 x 238 x 325 mm

(MSY-GE24/26VA)

MSY-GE24VA
Cooling capacity: 6.0kW*

MSY-GE26VA
Cooling capacity: 7.1kW*



Outdoor Unit System 3

3 MXV-3A28VA Outdoor unit 1:3 Indoor units
Total capacity of all indoor units must not exceed 14.6kW.

Certain unit combinations are not compatible. Please refer to the configuration pattern charts on the page 15-18 for more details.



MXV-3A28VA
Dimensions (W x D x H):
840 x 330 x 710 mm

System 4

4 MXV-4A28VA Outdoor unit 1:4 Indoor units
Total capacity of all indoor units must not exceed 15.6kW.

Certain unit combinations are not compatible. Please refer to the configuration pattern charts on the page 15-18 for more details.



MXV-4A28VA
Dimensions (W x D x H):
840 x 330 x 710 mm

Indoor Unit



Dimensions (W x D x H): 798 x 232 x 295 mm

Luminous Buttons

MSY-GE10VA
Cooling capacity: 2.5kW*

MSY-GE13VA
Cooling capacity: 3.5kW*

MSY-GE18VA
Cooling capacity: 5.0kW*




Dimensions (W x D x H): 1,100 x 238 x 325 mm

(MSY-GE24/26VA)

MSY-GE24VA
Cooling capacity: 6.0kW*

MSY-GE26VA
Cooling capacity: 7.1kW*

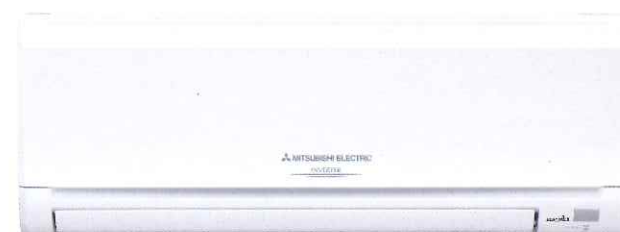

Dimensions (W x D x H): 798 x 232 x 295 mm

Luminous Buttons

MSY-GE10VA
Cooling capacity: 2.5kW*

MSY-GE13VA
Cooling capacity: 3.5kW*




Outdoor Unit

System 4

4 MXV-4A38VA Outdoor unit 1:4 Indoor units
Total capacity of all indoor units must not exceed 16.5kW.

Certain unit combinations are not compatible. Please refer to the configuration pattern charts on the page 15-18 for more details.

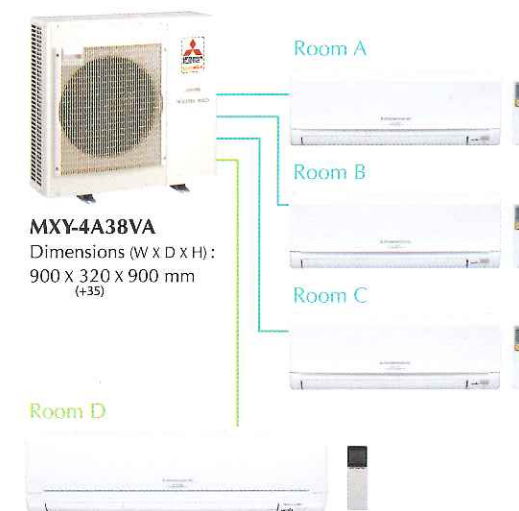

MXV-4A38VA
Dimensions (W x D x H):
900 x 320 x 900 mm
(+35)

System 2

2 MXV-2E20VA Outdoor unit 1:2 Indoor units
Total capacity of all indoor units must not exceed 7.0kW.

Certain unit combinations are not compatible. Please refer to the configuration pattern charts on the page 15-18 for more details.



MXV-2E20VA
Dimensions (W x D x H):
800 x 285 x 550 mm

Inverter Multi Split system MXY series

Model		EASY CLEAN, WIDE & LONG			
Outdoor		MXV-3A28VA	MXV-4A28VA	MXV-4A38VA	MXV-2E20VA
Indoor		MSY-GE10VA / MSY-GE13VA / MSY-GE18VA / MSY-GE24VA / MSY-GE26VA		MSY-GE10VA / MSY-GE13VA	
No. of connectable indoor units (System)		3	4	4	2
Function & type		Cooling, Wall-mounted			
Capacity		kW			
Power input		kW			
Max Running current (Indoor only)		A			
Airflow (High)		CMM(m ³ /min)			
Dimension		mm			
(W x D x H)		mm			
Net weight		kg			
*Noise level (Silent - High)		dB(A)			
Connection method		Indoor/Outdoor			
External piping		mm			
Diameter		mm			
Liquid (ø)		mm			
Max. length		m			
Max. height		m			
Power supply		V, Phase, Hz			
Energy labelling scheme		230, 1, 50			

*Note: Noise level is measured in anechoic chambers.
*Super high + long + powerful mode

Specifications

Type	Name	Rated Capacity (kW)	Max Running Current (A)	Fan speed	Airflow (High) (m ³ /min)	Sound level (dB(A))	Dimensions (WxDxH)	Net weight (kg)	Pipe size (mm)	Remote controller	External static pressure
Ceiling cassette	PLA-RP	3.5	0.22	4 steps	15.0	27-31	840 x 840 x 258	28	6.35 / 12.70	Wireless(S) / Wired(O)	-
	PLA-RP50BA	5.0	0.36	4 steps	18.0	28-32	840 x 840 x 258	28	6.35 / 12.70	Wireless(S) / Wired(O)	-
	PLA-RP60BA	6.0	0.36	4 steps	18.0	28-32	840 x 840 x 258	29	9.52 / 15.88	Wireless(S) / Wired(O)	-
	PLA-RP71BA	7.1	0.51	4 steps	21.0	28-34	840 x 840 x 258	29	9.52 / 15.88	Wireless(S) / Wired(O)	-
Ceiling Cassette	MLZ	3.5	0.30	3 steps	9.4	31-37	1102 x 360 x 175	18.5	6.35 / 9.52	Wireless(S)	-
	MLZ-KA50VA	5.0	0.30	3 steps	11.4	34-43	1102 x 360 x 175	18.5	6.35 / 9.52	Wireless(S)	-
	SEZ-KD	3.5	0.46	4 steps	11.0	23-33	990 x 700 x 200	21	6.35 / 9.52	Wireless(S) / Wired(O)	5/15/35/50
	SEZ-KD50VAL	5.0	0.63	4 steps	15.0	30-37	990 x 700 x 200	23	6.35 / 12.70	Wireless(S) / Wired(O)	5/15/35/50
Compact ceiling concealed	SEZ-KD60VAL	6.0	0.63	4 steps	18.0	30-38	1190 x 700 x 200	27	6.35 / 15.88	Wireless(S) / Wired(O)	5/15/35/50
	SEZ-KD71VAL	7.1	0.84	4 steps	20.0	30-40	1190 x 700 x 200	27	9.52 / 15.88	Wireless(S) / Wired(O)	5/15/35/50
Ceiling concealed	PEAD-RP	5.0	1.39	3 steps	17.0	26-35	900 x 732 x 250	28	6.35 / 12.70	Wireless(S) / Wired(O)	35/50/70/100/150
	PEAD-RP60JA(L)	6.0	1.62	3 steps	21.0	25-33	1100 x 732 x 250	33	9.52 / 15.88	Wireless(S) / Wired(O)	35/50/70/100/150
	PEAD-RP71JA(L)	7.1	1.97	3 steps	25.0	26-35	1100 x 732 x 250	33	9.52 / 15.88	Wireless(S) / Wired(O)	35/50/70/100/150
Wall mounted	MSXY-FD	2.5	0.25	4 steps	11.7	20-42	795 X 257 X 295	12	6.35 / 9.52	Wireless(S)	-
	MSXY-FD13VA	3.5	0.27	4 steps	12.1	20-43	795 X 257 X 295	12	6.35 / 9.52	Wireless(S)	-
	MSXY-FD18VA	5.0	0.53	4 steps	14.8	29-46	795 X 257 X 295	12	6.35 / 12.70	Wireless(S)	-
	MSXY-EF	2.5	0.14	5 steps	8.3	21-42	895 x 195 x 299	11.5	6.35 / 9.52	Wireless(S)	-
Wall mounted	MSXY-EF10VA	3.5	0.14	5 steps	8.3	21-42	895 x 195 x 299	11.5	6.35 / 9.52	Wireless(S)	-
	MSXY-EF13VA	5.0	0.18	5 steps	9.3	30-43	895 x 195 x 299	11.5	6.35 / 12.70	Wireless(S)	-

*PEAD-RP60JA(L) and PEAD-RP71JA(L) can be connected to MXY-4A38VA only.
Total Indoor Running current must not exceed 3Amps when connecting to PEAD series.
*MXY-2E20VA can be connected to wall mount series only of up to cooling capacity of 3.5kW.

Legend: (S)-Standard, (O)-Optional



Inverter Multi Split System MXY Series (For private dwellings & HDB flats without current limitation)

Outdoor unit	Indoor unit combination				Capacity of each indoor unit (kW)				Total capacity (kW)			Total power input (kW)			Total running current (A)			
	(A + B + C + D)				A	B	C	D	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	
MXV-3A28VA	1 Room	10				2.50	—	—	—	2.50	1.40	3.50	0.59	0.45	0.85	2.59	1.98	3.73
		13				3.50	—	—	—	3.50	1.50	4.30	0.81	0.45	1.00	3.56	1.98	4.39
		18				5.00	—	—	—	5.00	1.60	5.90	1.23	0.48	1.64	5.40	2.11	7.20
		24				6.00	—	—	—	6.00	1.60	6.60	1.72	0.54	1.95	7.55	2.37	8.56
		26				7.10	—	—	—	7.10	1.70	7.50	2.55	0.54	2.80	11.20	2.37	12.30
	2 Rooms	10+10	2.50	2.50	—	—	5.00	2.00	6.50	1.28	0.60	1.89	5.62	2.64	8.30			
		10+13	2.50	3.50	—	—	6.00	2.00	6.80	1.74	0.60	2.06	7.64	2.64	9.05			
		10+18	2.50	4.70	—	—	7.20	2.00	7.60	2.62	0.63	2.83	11.51	2.77	12.43			
		10+24	2.20	5.00	—	—	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14			
		10+26	2.10	5.10	—	—	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14			
		13+13	3.50	3.50	—	—	7.00	2.00	7.40	2.36	0.60	2.59	10.36	2.64	11.37			
		13+18	3.20	4.00	—	—	7.20	2.00	7.60	2.62	0.63	2.83	11.51	2.77	12.43			
		13+24	3.00	4.20	—	—	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14			
		13+26	2.90	4.30	—	—	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14			
		18+18	3.60	3.60	—	—	7.20	2.00	7.50	2.62	0.66	2.84	11.51	2.90	12.47			
		18+24	3.41	4.09	—	—	7.50	2.00	8.00	2.57	0.68	2.90	11.29	2.99	12.74			
		18+26	3.10	4.40	—	—	7.50	2.00	8.00	2.57	0.68	2.90	11.29	2.99	12.74			
		24+24	3.75	3.75	—	—	7.50	2.00	8.40	2.43	0.70	3.00	10.67	3.07	13.18			
		24+26	3.44	4.06	—	—	7.50	2.00	8.40	2.43	0.70	3.00	10.67	3.07	13.18			
	3 Rooms	10+10+10	2.50	2.50	2.50	—	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65			
		10+10+13	2.21	2.21	3.08	—	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65			
		10+10+18	1.88	1.88	3.74	—	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65			
		10+10+24	1.70	1.70	4.10	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65			
		10+10+26	1.55	1.55	4.40	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65			
		10+13+13	1.98	2.76	2.76	—	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65			
		10+13+18	1.70	2.39	3.41	—	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65			
		10+13+24	1.56	2.19	3.75	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65			
		10+13+26	1.44	2.00	4.06	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65			
		10+18+18	1.50	3.00	3.00	—	7.50	2.90	8.90	2.08	0.82	2.88	9.13	3.60	12.65			
		10+18+24	1.39	2.78	3.33	—	7.50	2.90	8.90	2.04	0.83	2.88	8.96	3.65	12.65			
		10+18+26	1.28	2.57	3.65	—	7.50	2.90	8.90	2.04	0.83	2.88	8.96	3.65	12.65			
		13+13+13	2.50	2.50	2.50	—	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65			
		13+13+18	2.19	2.19	3.12	—	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65			
		13+13+24	2.02	2.02	3.46	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65			
13+13+26		1.86	1.86	3.78	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65				
13+18+18		1.94	2.78	2.78	—	7.50	2.90	8.90	2.08	0.82	2.88	9.13	3.60	12.65				
13+18+24		1.82	2.58	3.10	—	7.50	2.90	8.90	2.04	0.82	2.88	8.96	3.60	12.65				
MXV-4A28VA		1 Room	10				2.50	—	—	—	2.50	1.40	3.50	0.59	0.45	0.85	2.59	1.98
	13					3.50	—	—	—	3.50	1.50	4.30	0.81	0.45	1.00	3.56	1.98	4.39
	18					5.00	—	—	—	5.00	1.60	5.90	1.23	0.48	1.64	5.40	2.11	7.20
	24					6.00	—	—	—	6.00	1.60	6.60	1.72	0.54	1.95	7.55	2.37	8.56
	26					7.10	—	—	—	7.10	1.70	7.50	2.55	0.54	2.80	11.20	2.37	12.30
	2 Rooms	10+10	2.50	2.50	—	—	5.00	2.00	6.50	1.28	0.60	1.89	5.62	2.64	8.30			
		10+13	2.50	3.50	—	—	6.00	2.00	6.80	1.74	0.60	2.06	7.64	2.64	9.05			
		10+18	2.50	4.70	—	—	7.20	2.00	7.60	2.62	0.63	2.83	11.51	2.77	12.43			
		10+24	2.20	5.00	—	—	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14			
		10+26	2.10	5.10	—	—	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14			
		13+13	3.50	3.50	—	—	7.00	2.00	7.40	2.36	0.60	2.59	10.36	2.64	11.37			
		13+18	3.20	4.00	—	—	7.20	2.00	7.60	2.62	0.63	2.83	11.51	2.77	12.43			
		13+24	3.00	4.20	—	—	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14			
		13+26	2.90	4.30	—	—	7.20	2.00	8.20	2.62	0.64	3.22	11.51	2.81	14.14			
		18+18	3.60	3.60	—	—	7.20	2.00	7.50	2.62	0.66	2.84	11.51	2.90	12.47			
		18+24	3.41	4.09	—	—	7.50	2.00	8.00	2.57	0.68	2.90	11.29	2.99	12.74			
		18+26	3.10	4.40	—	—	7.50	2.00	8.00	2.57	0.68	2.90	11.29	2.99	12.74			
		24+24	3.75	3.75	—	—	7.50	2.00	8.40	2.43	0.70	3.00	10.67	3.07	13.18			
		24+26	3.44	4.06	—	—	7.50	2.00	8.40	2.43	0.70	3.00	10.67	3.07	13.18			
	3 Rooms	10+10+10	2.50	2.50	2.50	—	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65			
		10+10+13	2.21	2.21	3.08	—	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65			
		10+10+18	1.88	1.88	3.74	—	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65			
		10+10+24	1.70	1.70	4.10	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65			
		10+10+26	1.55	1.55	4.40	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65			
		10+13+13	1.98	2.76	2.76	—	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65			
		10+13+18	1.70	2.39	3.41	—	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65			
		10+13+24	1.56	2.19	3.75	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65			
		10+13+26	1.44	2.00	4.06	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65			
		10+18+18	1.50	3.00	3.00	—	7.50	2.90	8.90	2.08	0.82	2.88	9.13	3.60	12.65			
		10+18+24	1.39	2.78	3.33	—	7.50	2.90	8.90	2.04	0.83	2.88	8.96	3.65	12.65			
		10+18+26	1.28	2.57	3.65	—	7.50	2.90	8.90	2.04	0.83	2.88	8.96	3.65	12.65			
		13+13+13	2.50	2.50	2.50	—	7.50	2.90	8.90	2.18	0.76	2.88	9.57	3.34	12.65			
		13+13+18	2.19	2.19	3.12	—	7.50	2.90	8.90	2.10	0.79	2.88	9.22	3.47	12.65			
		13+13+24	2.02	2.02	3.46	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65			
13+13+26		1.86	1.86	3.78	—	7.50	2.90	8.90	2.08	0.80	2.88	9.13	3.51	12.65				
13+18+18		1.94	2.78	2.78	—	7.50	2.90	8.90	2.08	0.82	2.88	9.13	3.60	12.65				
13+18+24		1.82	2.58	3.10	—	7.50	2.90	8.90	2.04	0.82	2.88	8.96	3.60	12.65				
4 Rooms		10+10+10+10	1.875	1.875	1.875	1.875	7.50	3.70	8.90	2.16	0.92	2.85	9.49	4.04	12.52			
	10+10+10+13	1.70	1.70	1.70	2.40	7.50	3.70	8.90	2.16	0.92	2.85	9.49	4.04	12.52				
	10+10+10+18	1.50	1.50	1.50	3.00	7.50	3.70	8.90	2.08	0.95	2.85	9.13	4.17	12.52				
	10+10+10+24	1.39	1.39	1.39	3.33	7.50	3.70	8.90	2.06	0.96	2.85	9.05	4.22	12.52				
	10+10+10+26	1.28	1.28	1.28	3.66	7.50	3.70	8.90	2.06	0.96	2.85	9.05	4.22	12.52				
	10+10+13+13	1.56	1.56	2.19	2.19	7.50	3.70	8.90	2.16	0.92	2.85	9.49	4.04	12.52				
	10+10+13+18	1.39	1.39	1.94	2.78	7.50	3.70	8.90	2.08	0.95	2.85	9.13	4.17	12.52				
	10+10+13+24	1.29	1.29	1.81	3.11	7.50	3.70	8.90	2.06	0.95	2.85	9.05	4.17	12.52				
	10+10+13+26	1.20	1.20	1.68	3.42	7.50	3.70	8.90	2.06	0.95	2.85	9.05	4.17	12.52				
	10+13+13+13	1.44	2.02	2.02	2.02	7.50	3.70	8.90	2.16	0.92	2.85	9.49	4.04	12.52				
	10+13+13+18	1.29	1.81	1.81	2.59	7.50	3.70	8.90	2.08	0.95	2.85	9.13	4.17	12.52				
	10+13+13+24	1.29	1.81	1.81	2.59	7.50	3.70	8.90	2.08	0.95	2.85	9.13	4.17	12.52				
	10+13+18+18	1.875	1.875	1.875	1.875	7.50	3.70	8.90	2.16	0.95	2.85	9.49	4.04	12.52				
	10+13+18+24	1.70	1.70	1.70	2.40	7.50	3.70	8.90	2.16	0.92	2.85	9.49	4.04	12.52				
	10+13+24+24	1.50	1.50	1.50	3.00	7.50	3.70	8.90	2.08	0.95	2.85	9.13	4.17	12.52				


Inverter Multi Split System MXY Series (For private dwellings & HDB flats without current limitation)

Outdoor unit	Indoor unit combination		Capacity of each indoor unit (kW)				Total capacity (kW)			Total power input (kW)			Total running current (A)			
		(A + B + C + D)	A	B	C	D	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	
MXY-4A38VA	1 Room	10	2.50	–	–	–	2.50	1.40	3.50	0.59	0.43	0.81	2.59	1.89	3.56	
		13	3.50	–	–	–	3.50	1.40	4.30	0.81	0.43	1.00	3.56	1.89	4.39	
		18	5.00	–	–	–	5.00	1.50	6.10	1.23	0.47	1.64	5.40	2.06	7.20	
		24	6.00	–	–	–	6.00	1.60	6.70	1.72	0.47	1.93	7.55	2.06	8.48	
		26	7.10	–	–	–	7.10	1.60	8.50	2.55	0.47	3.48	11.20	2.06	15.28	
	2 Rooms	10+10	2.50	2.50	–	–	5.00	2.00	6.50	1.18	0.64	1.89	5.18	2.81	8.30	
		10+13	2.50	3.50	–	–	6.00	2.00	7.30	1.61	0.64	2.35	7.07	2.81	10.32	
		10+18	2.50	5.00	–	–	7.50	2.00	8.50	2.46	0.64	3.28	10.80	2.81	14.40	
		10+24	2.50	6.00	–	–	8.50	2.00	8.70	3.32	0.65	3.48	14.58	2.85	15.28	
		10+26	2.27	6.43	–	–	8.70	2.00	8.80	3.38	0.65	3.48	14.84	2.85	15.28	
		13+13	3.50	3.50	–	–	7.00	2.00	8.80	2.22	0.64	3.33	9.75	2.81	14.62	
		13+18	3.50	5.00	–	–	8.50	2.00	8.90	3.32	0.64	3.48	14.58	2.81	15.28	
		13+24	3.21	5.49	–	–	8.70	2.00	9.10	3.27	0.65	3.48	14.36	2.85	15.28	
		13+26	2.87	5.83	–	–	8.70	2.00	9.10	3.20	0.65	3.48	14.05	2.85	15.28	
		18+18	4.35	4.35	–	–	8.70	2.10	9.10	3.20	0.69	3.48	14.05	3.03	15.28	
		18+24	4.00	4.80	–	–	8.80	2.10	9.20	3.20	0.69	3.48	14.05	3.03	15.28	
		18+26	3.64	5.16	–	–	8.80	2.10	9.20	3.20	0.69	3.48	14.05	3.03	15.28	
		24+24	4.40	4.40	–	–	8.80	2.10	9.20	3.20	0.69	3.48	14.05	3.03	15.28	
		24+26	4.03	4.77	–	–	8.80	2.10	9.20	3.20	0.69	3.48	14.05	3.03	15.28	
		26+26	4.40	4.40	–	–	8.80	2.10	9.20	3.20	0.69	3.48	14.05	3.03	15.28	
		3 Rooms	10+10+10	2.50	2.50	2.50	–	7.50	2.90	10.00	1.88	0.78	3.48	8.26	3.43	15.28
			10+10+13	2.50	2.50	3.50	–	8.50	2.90	10.00	2.33	0.78	3.48	10.23	3.43	15.28
			10+10+18	2.28	2.28	4.54	–	9.10	2.90	10.60	2.52	0.81	3.48	11.07	3.56	15.28
			10+10+24	2.07	2.07	4.96	–	9.10	2.90	10.60	2.51	0.81	3.48	11.02	3.56	15.28
			10+10+26	1.88	1.88	5.34	–	9.10	2.90	10.60	2.51	0.81	3.48	11.02	3.56	15.28
			10+13+13	2.36	3.32	3.32	–	9.00	2.90	10.60	2.54	0.78	3.48	11.16	3.43	15.28
	10+13+18		2.07	2.90	4.13	–	9.10	2.90	10.60	2.51	0.81	3.48	11.02	3.56	15.28	
	10+13+24		1.90	2.65	4.55	–	9.10	2.90	10.60	2.51	0.81	3.48	11.02	3.56	15.28	
	10+13+26		1.76	2.46	4.98	–	9.20	2.90	10.70	2.59	0.81	3.48	11.37	3.56	15.28	
	10+18+18		1.84	3.68	3.68	–	9.20	2.90	10.70	2.58	0.81	3.48	11.33	3.56	15.28	
	10+18+24		1.70	3.42	4.08	–	9.20	2.90	10.70	2.58	0.81	3.48	11.33	3.56	15.28	
	10+18+26		1.58	3.15	4.47	–	9.20	2.90	10.70	2.56	0.81	3.48	11.24	3.56	15.28	
	10+24+24		1.58	3.81	3.81	–	9.20	2.90	10.70	2.55	0.81	3.48	11.20	3.56	15.28	
	13+13+13		3.00	3.00	3.00	–	9.00	2.90	10.60	2.52	0.81	3.48	11.07	3.56	15.28	
	13+13+18		2.65	2.65	3.80	–	9.10	2.90	10.60	2.51	0.81	3.48	11.02	3.56	15.28	
	13+13+24		2.48	2.48	4.24	–	9.20	2.90	10.70	2.59	0.81	3.48	11.37	3.56	15.28	
	13+13+26		2.28	2.28	4.64	–	9.20	2.90	10.70	2.59	0.81	3.48	11.37	3.56	15.28	
	13+18+18		2.38	3.41	3.41	–	9.20	2.90	10.70	2.58	0.81	3.48	11.33	3.56	15.28	
	13+18+24	2.22	3.17	3.81	–	9.20	2.90	10.70	2.56	0.81	3.48	11.24	3.56	15.28		
	13+24+24	2.08	3.56	3.56	–	9.20	2.90	10.80	2.55	0.81	3.48	11.20	3.56	15.28		
	18+18+18	3.06	3.06	3.06	–	9.18	2.90	10.80	2.53	0.83	3.48	11.11	3.65	15.28		
	4 Rooms	10+10+10+10	2.30	2.30	2.30	2.30	9.20	3.70	11.20	2.48	0.93	3.48	10.89	4.08	15.28	
		10+10+10+13	2.09	2.09	2.09	2.93	9.20	3.70	11.20	2.48	0.93	3.48	10.89	4.08	15.28	
		10+10+10+18	1.84	1.84	1.84	3.68	9.20	3.70	11.20	2.45	0.93	3.45	10.76	4.08	15.15	
		10+10+10+24	1.70	1.70	1.70	4.10	9.20	3.70	11.20	2.44	0.93	3.44	10.72	4.08	15.11	
		10+10+10+26	1.58	1.58	1.58	4.46	9.20	3.70	11.20	2.44	0.93	3.44	10.72	4.08	15.11	
		10+10+13+13	1.92	1.92	2.68	2.68	9.20	3.70	11.20	2.48	0.93	3.48	10.89	4.08	15.28	
		10+10+13+18	1.70	1.70	2.39	3.41	9.20	3.70	11.20	2.45	0.93	3.45	10.76	4.08	15.15	
		10+10+13+24	1.59	1.59	2.22	3.80	9.20	3.70	11.20	2.44	0.93	3.44	10.72	4.08	15.11	
		10+10+13+26	1.47	1.47	2.07	4.19	9.20	3.70	11.20	2.44	0.93	3.44	10.72	4.08	15.11	
		10+10+18+18	1.53	1.53	3.07	3.07	9.20	3.70	11.20	2.41	0.95	3.41	10.58	4.17	14.98	
		10+13+13+13	1.76	2.48	2.48	2.48	9.20	3.70	11.20	2.48	0.93	3.48	10.89	4.08	15.28	
		10+13+13+18	1.59	2.22	2.22	3.17	9.20	3.70	11.20	2.45	0.93	3.45	10.76	4.08	15.15	
		10+13+13+24	1.48	2.08	2.08	3.56	9.20	3.70	11.20	2.44	0.93	3.44	10.72	4.08	15.11	
		13+13+13+13	2.30	2.30	2.30	2.30	9.20	3.70	11.20	2.48	0.93	3.48	10.89	4.08	15.28	
		13+13+13+18	2.08	2.08	2.08	2.96	9.20	3.70	11.20	2.45	0.93	3.45	10.76	4.08	15.15	
		13+13+13+24	1.95	1.95	1.95	3.35	9.20	3.70	11.20	2.45	0.93	3.45	10.76	4.08	15.15	
MXY-2E20VA	1 Room	10	2.50	–	–	–	2.50	0.90	2.60	0.70	0.15	0.71	3.38	0.72	3.43	
		13	3.50	–	–	–	3.50	0.90	3.65	0.98	0.15	0.99	4.73	0.72	4.78	
	2 Rooms	10+10	2.40	2.40	–	–	4.80	1.10	6.30	1.44	0.30	2.44	6.45	1.34	10.94	
		10+13	2.10	2.80	–	–	4.90	1.10	6.40	1.44	0.30	2.44	6.45	1.34	10.94	
		13+13	2.50	2.50	–	–	5.00	1.10	6.55	1.44	0.31	2.44	6.45	1.39	10.94	


Inverter Multi Split System MXY Series (For HDB flats with limited current)

Outdoor unit	Indoor unit combination					Capacity of each indoor unit (kW)				Total capacity (kW)			Total power input (kW)			Total running current (A)		
	(A + B + C + D)					A	B	C	D	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.
MXY-3A28VA (8.5A)	1 Room	10	2.50	—	—	—	2.50	1.40	3.50	0.59	0.45	0.85	2.59	1.98	3.73			
		13	3.50	—	—	—	3.50	1.50	4.30	0.81	0.45	1.00	3.56	1.98	4.39			
		18	5.00	—	—	—	5.00	1.60	5.90	1.23	0.48	1.64	5.40	2.11	7.20			
		24	6.00	—	—	—	6.00	1.60	6.60	1.72	0.54	1.95	7.55	2.37	8.56			
		26	6.70	—	—	—	6.70	1.70	6.70	1.93	0.54	1.93	8.48	2.37	8.48			
	2 Rooms	10+10	2.50	2.50	—	—	5.00	2.00	6.50	1.28	0.60	1.89	5.62	2.64	8.30			
		10+13	2.50	3.50	—	—	6.00	2.00	6.60	1.74	0.60	1.93	7.64	2.64	8.48			
		10+18	2.25	4.45	—	—	6.70	2.00	6.70	1.91	0.63	1.91	8.39	2.77	8.39			
		10+24	1.99	4.71	—	—	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39			
		10+26	1.77	4.93	—	—	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39			
		13+13	3.35	3.35	—	—	6.70	2.00	6.70	1.93	0.60	1.93	8.48	2.64	8.48			
		13+18	2.77	3.93	—	—	6.70	2.00	6.70	1.91	0.63	1.91	8.39	2.77	8.39			
		13+24	2.48	4.22	—	—	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39			
		13+26	2.23	4.47	—	—	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39			
		18+18	3.35	3.35	—	—	6.70	2.00	6.70	1.91	0.66	1.91	8.39	2.90	8.39			
		18+24	3.05	3.65	—	—	6.70	2.00	6.70	1.91	0.68	1.91	8.39	2.99	8.39			
		18+26	2.80	3.90	—	—	6.70	2.00	6.70	1.91	0.68	1.91	8.39	2.99	8.39			
		24+24	3.35	3.35	—	—	6.70	2.00	6.70	1.91	0.70	1.91	8.39	3.07	8.39			
		24+26	3.07	3.63	—	—	6.70	2.00	6.70	1.91	0.70	1.91	8.39	3.07	8.39			
		3 Rooms	10+10+10	2.40	2.40	2.40	—	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34		
			10+10+13	2.11	2.11	2.98	—	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34		
			10+10+18	1.78	1.78	3.64	—	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34		
			10+10+24	1.60	1.60	4.00	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34		
	10+10+26		1.45	1.45	4.30	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34			
	10+13+13		1.88	2.66	2.66	—	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34			
	10+13+18		1.60	2.29	3.31	—	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34			
	10+13+24		1.46	2.09	3.65	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34			
	10+13+26		1.34	1.90	3.96	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34			
	10+18+18		1.40	2.90	2.90	—	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34			
	10+18+24		1.29	2.68	3.23	—	7.20	2.90	7.20	1.90	0.83	1.90	8.34	3.65	8.34			
	10+18+26		1.18	2.47	3.55	—	7.20	2.90	7.20	1.90	0.83	1.90	8.34	3.65	8.34			
	13+13+13		2.40	2.40	2.40	—	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34			
	13+13+18		2.09	2.09	3.02	—	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34			
	13+13+24		1.92	1.92	3.36	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34			
	13+13+26		1.76	1.76	3.68	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34			
	13+18+18		1.84	2.68	2.68	—	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34			
13+18+24	1.72		2.48	3.00	—	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34				
MXY-4A28VA (8.5A)	1 Room	10	2.50	—	—	—	2.50	1.40	3.50	0.59	0.45	0.85	2.59	1.98	3.73			
		13	3.50	—	—	—	3.50	1.50	4.30	0.81	0.45	1.00	3.56	1.98	4.39			
		18	5.00	—	—	—	5.00	1.60	5.90	1.23	0.48	1.64	5.40	2.11	7.20			
		24	6.00	—	—	—	6.00	1.60	6.60	1.72	0.54	1.95	7.55	2.37	8.56			
		26	6.70	—	—	—	6.70	1.70	6.70	1.93	0.54	1.93	8.48	2.37	8.48			
	2 Rooms	10+10	2.50	2.50	—	—	5.00	2.00	6.50	1.28	0.60	1.89	5.62	2.64	8.30			
		10+13	2.50	3.50	—	—	6.00	2.00	6.60	1.74	0.60	1.93	7.64	2.64	8.48			
		10+18	2.25	4.45	—	—	6.70	2.00	6.70	1.91	0.63	1.91	8.39	2.77	8.39			
		10+24	1.99	4.71	—	—	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39			
		10+26	1.77	4.93	—	—	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39			
		13+13	3.35	3.35	—	—	6.70	2.00	6.70	1.93	0.60	1.93	8.48	2.64	8.48			
		13+18	2.77	3.93	—	—	6.70	2.00	6.70	1.91	0.63	1.91	8.39	2.77	8.39			
		13+24	2.48	4.22	—	—	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39			
		13+26	2.23	4.47	—	—	6.70	2.00	6.70	1.91	0.64	1.91	8.39	2.81	8.39			
		18+18	3.35	3.35	—	—	6.70	2.00	6.70	1.91	0.66	1.91	8.39	2.90	8.39			
		18+24	3.05	3.65	—	—	6.70	2.00	6.70	1.91	0.68	1.91	8.39	2.99	8.39			
		18+26	2.80	3.90	—	—	6.70	2.00	6.70	1.91	0.68	1.91	8.39	2.99	8.39			
		24+24	3.35	3.35	—	—	6.70	2.00	6.70	1.91	0.70	1.91	8.39	3.07	8.39			
		24+26	3.07	3.63	—	—	6.70	2.00	6.70	1.91	0.70	1.91	8.39	3.07	8.39			
		3 Rooms	10+10+10	2.40	2.40	2.40	—	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34		
			10+10+13	2.11	2.11	2.98	—	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34		
			10+10+18	1.78	1.78	3.64	—	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34		
			10+10+24	1.60	1.60	4.00	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34		
	10+10+26		1.45	1.45	4.30	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34			
	10+13+13		1.88	2.66	2.66	—	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34			
	10+13+18		1.60	2.29	3.31	—	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34			
	10+13+24		1.46	2.09	3.65	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34			
	10+13+26		1.34	1.90	3.96	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34			
	10+18+18		1.40	2.90	2.90	—	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34			
	10+18+24		1.29	2.68	3.23	—	7.20	2.90	7.20	1.90	0.83	1.90	8.34	3.65	8.34			
	10+18+26		1.18	2.47	3.55	—	7.20	2.90	7.20	1.90	0.83	1.90	8.34	3.65	8.34			
	13+13+13		2.40	2.40	2.40	—	7.20	2.90	7.20	1.90	0.76	1.90	8.34	3.34	8.34			
	13+13+18		2.09	2.09	3.02	—	7.20	2.90	7.20	1.90	0.79	1.90	8.34	3.47	8.34			
	13+13+24		1.92	1.92	3.36	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34			
	13+13+26		1.76	1.76	3.68	—	7.20	2.90	7.20	1.90	0.80	1.90	8.34	3.51	8.34			
	13+18+18		1.84	2.68	2.68	—	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34			
13+18+24	1.72		2.48	3.00	—	7.20	2.90	7.20	1.90	0.82	1.90	8.34	3.60	8.34				
4 Rooms	10+10+10+10	1.80	1.80	1.80	1.80	7.20	3.70	7.20	1.89	0.92	1.89	8.30	4.04	8.30				
	10+10+10+13	1.80	1.80	1.80	1.80	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.04	8.30				
	10+10+10+18	1.50	1.50	1.50	2.70	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30				
	10+10+10+24	1.39	1.39	1.39	3.03	7.20	3.70	7.20	1.89	0.96	1.89	8.30	4.22	8.30				
	10+10+10+26	1.28	1.28	1.28	3.36	7.20	3.70	7.20	1.89	0.96	1.89	8.30	4.22	8.30				
	10+10+13+13	1.80	1.80	1.80	1.80	7.20	3.70	7.20	1.89	0.92	1.89	8.30	4.04	8.30				
	10+10+13+18	1.50	1.50	1.50	2.70	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30				
	10+10+13+24	1.39	1.39	1.39	3.03	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30				
	10+10+13+26	1.28	1.28	1.28	3.36	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30				
	10+13+13+13	1.80	1.80	1.80	1.80	7.20	3.70	7.20	1.89	0.92	1.89	8.30	4.04	8.30				
	10+13+13+18	1.50	1.50	1.50	2.70	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30				
	13+13+13+13	1.80	1.80	1.80	1.80	7.20	3.70	7.20	1.89	0.95	1.89	8.30	4.17	8.30				

Inverter Multi Split System MXY Series (For HDB flats with limited current)

Outdoor unit	Indoor unit combination (A + B + C + D)	Capacity of each indoor unit (kW)				Total capacity (kW)			Total power input (kW)			Total running current (A)		
		A	B	C	D	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.	Nominal Rating	Min.	Max.
MXY-4A38VA (8.5A)	1 Room	10	2.50	-	-	2.50	1.40	3.50	0.59	0.43	0.81	2.59	1.89	3.56
		13	3.50	-	-	3.50	1.40	4.30	0.81	0.43	1.00	3.56	1.89	4.39
		18	5.00	-	-	5.00	1.50	6.10	1.23	0.47	1.64	5.40	2.06	7.20
		24	6.00	-	-	6.00	1.60	6.70	1.72	0.47	1.93	7.55	2.06	8.48
		26	6.70	-	-	6.70	1.60	6.70	1.93	0.47	1.93	8.48	2.06	8.48
	2 Rooms	10+10	2.50	2.50	-	5.00	2.00	6.50	1.18	0.64	1.89	5.18	2.81	8.30
		10+13	2.50	3.50	-	6.00	2.00	6.60	1.61	0.64	1.89	7.07	2.81	8.30
		10+18	2.20	4.40	-	6.60	2.00	6.60	1.93	0.64	1.93	8.48	2.81	8.48
		10+24	1.94	4.66	-	6.60	2.00	6.60	1.93	0.65	1.93	8.48	2.85	8.48
		10+26	1.72	4.88	-	6.60	2.00	6.60	1.93	0.65	1.93	8.48	2.85	8.48
		13+13	3.25	3.25	-	6.50	2.00	6.50	1.93	0.64	1.93	8.48	2.81	8.48
		13+18	2.72	3.88	-	6.60	2.00	6.60	1.93	0.64	1.93	8.48	2.81	8.48
		13+24	2.43	4.17	-	6.60	2.00	6.60	1.93	0.65	1.93	8.48	2.85	8.48
		13+26	2.18	4.42	-	6.60	2.00	6.60	1.93	0.65	1.93	8.48	2.85	8.48
		18+18	3.35	3.35	-	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
		18+24	3.05	3.65	-	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
		18+26	2.80	3.90	-	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
		24+24	3.35	3.35	-	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
		24+26	3.07	3.63	-	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
		26+26	3.35	3.35	-	6.70	2.10	6.70	1.93	0.69	1.93	8.48	3.03	8.48
	3 Rooms	10+10+10	2.50	2.50	2.50	7.50	2.90	7.60	1.88	0.78	1.93	8.26	3.43	8.48
		10+10+13	2.24	2.24	3.12	7.60	2.90	7.60	1.93	0.78	1.93	8.48	3.43	8.48
		10+10+18	1.95	1.95	3.90	7.80	2.90	7.80	1.93	0.81	1.93	8.48	3.56	8.48
		10+10+24	1.77	1.77	4.26	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		10+10+26	1.61	1.61	4.58	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		10+13+13	2.00	2.80	2.80	7.60	2.90	7.60	1.93	0.78	1.93	8.48	3.43	8.48
		10+13+18	1.77	2.48	3.55	7.80	2.90	7.80	1.93	0.81	1.93	8.48	3.56	8.48
		10+13+24	1.63	2.27	3.90	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		10+13+26	1.49	2.08	4.23	7.80	2.90	7.80	1.93	0.81	1.92	8.48	3.56	8.43
		10+18+18	1.56	3.12	3.12	7.80	2.90	7.80	1.93	0.81	1.93	8.48	3.56	8.48
		10+18+24	1.44	2.89	3.47	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		10+18+26	1.34	2.67	3.79	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		10+24+24	1.34	3.23	3.23	7.80	2.90	7.80	1.91	0.81	1.91	8.39	3.56	8.39
		13+13+13	2.53	2.53	2.53	7.59	2.90	7.59	1.93	0.81	1.93	8.48	3.56	8.48
		13+13+18	2.28	2.28	3.24	7.80	2.90	7.80	1.93	0.81	1.93	8.48	3.56	8.48
		13+13+24	2.10	2.10	3.60	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		13+13+26	1.94	1.94	3.92	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		13+18+18	2.02	2.89	2.89	7.80	2.90	7.80	1.93	0.81	1.93	8.48	3.56	8.48
		13+18+24	1.88	2.69	3.23	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
		13+24+24	1.76	3.02	3.02	7.80	2.90	7.80	1.92	0.81	1.92	8.43	3.56	8.43
	4 Rooms	18+18+18	2.60	2.60	2.60	7.80	2.90	7.80	1.91	0.83	1.91	8.39	3.65	8.39
		10+10+10+10	2.00	2.00	2.00	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+10+13	1.82	1.82	1.82	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+10+18	1.60	1.60	1.60	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+10+24	1.48	1.48	1.48	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+10+26	1.37	1.37	1.37	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+13+13	1.67	1.67	2.33	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+13+18	1.48	1.48	2.08	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+13+24	1.38	1.38	1.93	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+13+26	1.28	1.28	1.80	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+10+18+18	1.33	1.33	2.67	8.00	3.70	8.00	1.93	0.95	1.93	8.48	4.17	8.48
		10+13+13+13	1.55	2.15	2.15	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+13+13+18	1.38	1.93	1.93	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		10+13+13+24	1.29	1.81	1.81	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		13+13+13+13	2.00	2.00	2.00	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		13+13+13+18	1.81	1.81	1.81	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
		13+13+13+24	1.70	1.70	1.70	8.00	3.70	8.00	1.93	0.93	1.93	8.48	4.08	8.48
MXY-2E20VA (8.5A)	1 Room	10	2.50	-	-	2.50	0.90	2.60	0.70	0.15	0.71	3.38	0.72	3.43
		13	3.50	-	-	3.50	0.90	3.65	0.98	0.15	0.99	4.73	0.72	4.78
	2 Rooms	10+10	2.40	2.40	-	4.80	1.10	5.80	1.44	0.30	1.90	6.45	1.34	8.43
		10+13	2.10	2.80	-	4.90	1.10	5.90	1.44	0.30	1.90	6.45	1.34	8.43
		13+13	2.50	2.50	-	5.00	1.10	6.00	1.44	0.31	1.90	6.45	1.39	8.43

EF Series

Developed to complement modern interior room décor, StarMEX ZEN air conditioners are available in three colours specially chosen to blend in naturally wherever installed.



MSY-EF10/13/18VAW

White



MSY-EF10/13/18VAS

Silver



MSY-EF10/13/18VAB

Black

Stylish Line-up Matches Any Room Décor

The streamlined wall-mounted indoor units have eloquent silver-bevelled edges, expressing sophistication and quality. Combining impressively low power consumption and quiet yet powerful performance, these units provide a best-match scenario for diverse interior designs while simultaneously ensuring maximum room and energy savings.

Weekly Timer Function

Easily sets desired temperatures and operation start/stop times to match lifestyle patterns. Reduces wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

Easy Set-up Using Dedicated Buttons



The remote controller is equipped with buttons that are used exclusively for setting the Weekly Timer. Setting operation patterns is easy and quick.



- Settings**
- A maximum of 4 ON or OFF timers can be set for individual days of the week
 - A maximum of 28 ON or OFF timers can be set for a week.


**E.g. : Runs at 24°C from waking up to leaving home, and runs at 27°C from getting home to going to bed on weekdays.
Runs at 27°C from waking up late to going to bed early on weekends.**

	Setting1	Setting2	Setting3	Setting4
Mon	ON	OFF	ON	OFF
Fri	6:00	8:30	17:30	22:00
Sat	ON	OFF	ON	OFF
Sun	8:00	21:00		

Quiet Comfort All Day Long

Mitsubishi Electric's advanced "Quiet Mode" fan speed setting provides super-quiet operation as low as 21dB for EF10/13 models. This unique feature makes the StarMEX ZEN series ideal for use in any situation.

Noise Level

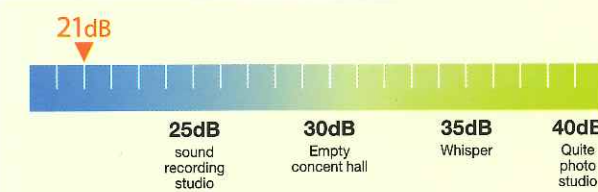

Nano Platinum Filter

This filter incorporates nanometre-sized platinum-ceramic particles that generate stable antibacterial and deodorising effects. The size of the three-dimensional surface has been increased as well, enlarging the filter capture area. These features give the Nano Platinum Filter better dust collection performance than conventional filters. The superior air-cleaning effectiveness raises room comfort yet another level.




* It is okay to wash the filter with water (air-cleaning effect is maintained)

3D surface (Waved surface)

Superior Exterior and Operating Design Concept

The indoor unit of the StarMEX ZEN keeps its amazingly thin form even during operation. The only physical change noticeable is the movement of the variable vent. As a result, a slim attractive look is maintained.

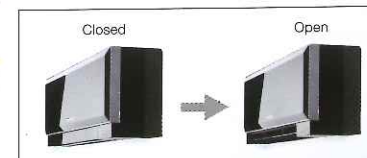


FD Series

The FD Series is designed for optimum cooling/heating performance as well as operational comfort. Quiet, energy-saving operation is supported by some of Mitsubishi Electric's latest technologies. Advanced functions such as i-see Sensor temperature control and the Plasma Duo air filtering and purification system raise room comfort levels to new heights.

Mold Fighter

The MSXY-FD is equipped with a "Mold Fighter" function designed to suppress the growth of the spore of the mold. The ozone generated in the plasma electrode unit attacks the mold spores, reducing mold growth speed by about 20%.

Mold Fought Mechanism



What is "Ozone"?

Ozone (O₃) is very uncertain molecule. It is resolved gradually and naturally into oxygen (O₂). During resolving, the "Nascent oxygen (O)" is produced. The nascent oxygen strongly oxidizes the organic matter or the inorganic matter, which product the effect for sterilization, deodorizing or etc.




The consistency of ozone during ozone showering is under the safety level

- Inside of indoor unit 0.1ppm
- > Under the upper limit of acceptable range of ozone gas consistency at working environment (Safety limit advised by Japan society for occupational health)
- In the room 0.01ppm or less
- > Under the average consistency of ozone in the coast area and forest area.

Plasma Duo Filter Systems

Besides a pre-filter, the unit is also mounted with two plasma air-purifying functions. These functions are engineered to zap air dirt particles from micron to nano-size in scale.

[Effective range]

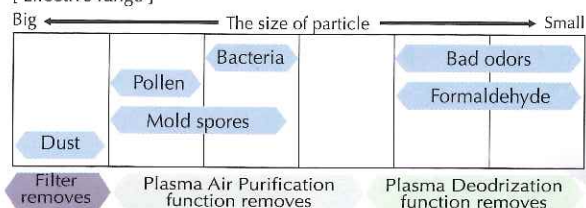

Plasma Deodorizing Filter

"Platinum catalyst deodorizing filter" is attached. Minimum holes as small as 1 nanometer on a surface of approximately 3,000m² capture small foul-smelling substances in the air, then v-break down the source of the odors with the power of the ozone generated in a plasma electrode unit and the platinum catalyst contained in the filter.

Plasma Deodorizing Filter mechanism



Deodorizing speed approximately doubled (compared to FA)


- 1 Plasma electrode unit produces ozone.
- 2 Particles of odor-releasing substances are absorbed.
- 3 Particles of odor-releasing substances are decomposed by ozone.



MSZ-FD25/35/50VA

i-see Sensor MSXY-FD10/13/18VA

The "i see sensor" automatically moves from side to side, searching floor temperature over a wide area of 150°.

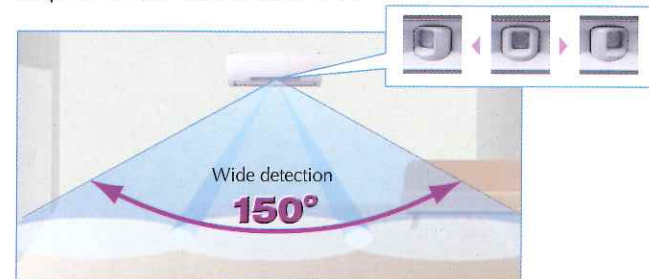

Conventional air-conditioners control indoor temperature by using only the temperature of the intake air at the top of the room. As a result, the floor level temperature, which exerts such a keen impact on the temperature that people feel, tends to be overlooked. i-see Sensor detects the floor temperatures to ensure the comfort in the living areas.

At Cooling



Cold air tends to sink to foot level, which is often the cause of over chilling. The i-see Sensor tracks this foot-level temperature to prevent over chilling.

PLA Series

New 4-way Ceiling Cassette Provided with Radiation Temperature Sensor, "i-see sensor," Presents Advanced and Upgraded Thermal Comfort.



Fully Evolved New 4-way Ceiling Cassette

Wide Airflow

The new wide shape vane capable of wide angle air supply provides comfort even at the corners of a room regardless of cooling and heating operation. A reduction in the air speed by 20% compared to the conventional product eliminates uncomfortable draft sensation for friendly air conditioning.



Draft-less Air Distribution


The horizontal blow mode! newly employed supplies airflow horizontally not bringing cooled/warmed air directly to occupants thus preventing discomfort sensation due to excessive cooling or direct exposing of occupants to the air blow.

- Default
- The ceiling may be smudged at a spot where the supplied airflow is seriously disturbed.



Setting of Airflow Direction by Individual Vane

When the airflow direction at the outlet is desired to be changed for altering of your room layout or for switching over of cooling and heating operation at the applicable season, a troublesome work was required in the past. However, the new 4-way Ceiling Cassette can change the setting by using the wired remote controller.




Remote Control setting

The New Swing Function Warms All Corners of the Room


The wave airflow system has 4 vanes where each vane runs independently. Repeating of horizontal and down blows with a time lag allows the conditioned warm air to be distributed even to room corners thus preventing uneven room temperature distribution.

Operation image of "Wave Airflow"

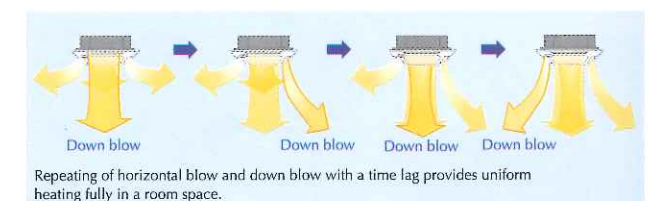

1 Vertical swinging mode is adapted in the case of cooling operation.

Thermograph of wave control effect

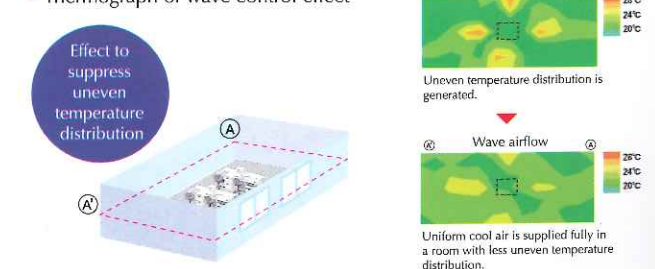

• Comparison was made at a time for about 20 minutes after starting of the 4-way Ceiling Cassette PLA-RP718A. The measuring point for comparison located on a plain surface of 1.2m above the floor.

MLZ Series

Introducing a new ceiling cassette type in the Multi-Split Series, designed to streamline room interior dimensions and looks.



MLZ-KA35/50VA

Ceiling Mounted Style

Ceiling mounted installation helps streamline room interiors. The overhead format is also an excellent solution when lighting equipment is installed at the center of the room and fixtures like bookshelves mounted on wall surfaces.



Access door isn't needed

Slim Body

This new unit is designed with a slim body only 175mm in height, ensuring easy installation even when low ceiling cavities limit installation space. Also eliminates the need for ceiling cavity service space, further reducing the dimensions required for installation.



Air Volume Settings by Ceiling Height

Dual-level air volume selection is engineered to accommodate specific ceiling heights. This feature offers the key to effective adjustments when airflow is either too strong or too weak because of the mismatching of the ceiling height.

	25	35	50
Standard	2.4m	2.4m	2.4m
High ceiling	2.7m	2.7m	2.7m

Auto Vane Control

With remote controller, the air outlet can be controlled left and right, and up and down. The draft problem can be solved by this improved air outlet control.

Left and Right




Up and Down

Easy Installation

Parts for greater speed and ease in the installation process are equipped. For example, a built-in drainpump (built for 500mm lift), provides flexible drain joint for easy drain hose attachment in the ceiling cavity area. Besides these, this model eliminates the need to wrap heat-insulation tape after connecting the pipes at the drain cover, a step that boosts peace of mind in preventing dew drops.



• Drain Piping Supporters

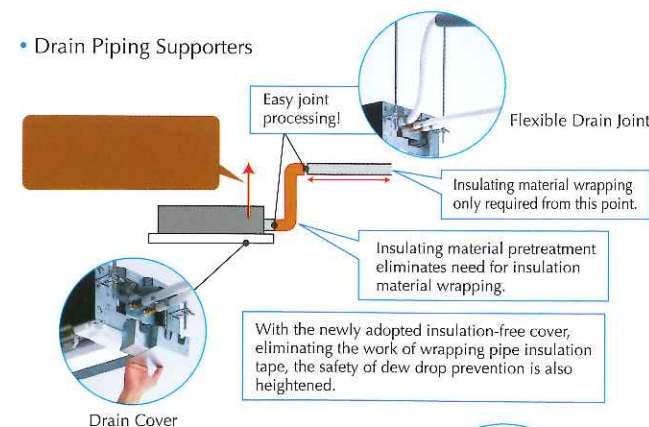

With the newly adopted insulation-free cover, eliminating the work of wrapping pipe insulation tape, the safety of dew drop prevention is also heightened.

• Easy Mounting Plate


The well-designed mounting plate makes the suspension work easier.

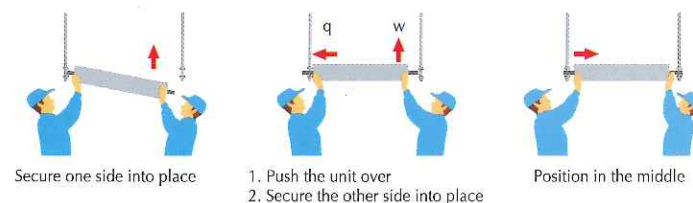

Secure one side into place

1. Push the unit over
2. Secure the other side into place

Position in the middle

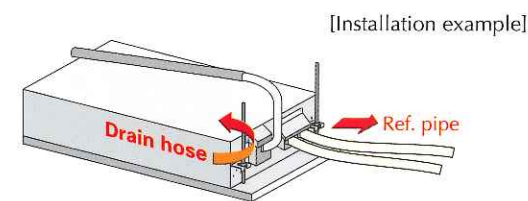

[Installation example]

The flexible drain joint helps the drain piping works when working in narrow ceiling areas.

PEAD Series


The thin, ceiling-concealed indoor units of this series are the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space and wide-ranging external static pressure. Energy-saving efficiency has been improved, reducing electricity consumption and contributing to a further reduction in operating cost.



PEAD-RP50/60/71

Compact Indoor Units

The height of the models from 35-140 has been unified to 250mm. Compared to the previous PEAD-RP EA model, the height has been reduced by as much as 75mm (models 100-140), making installation in low ceilings with minimal clearance space possible.

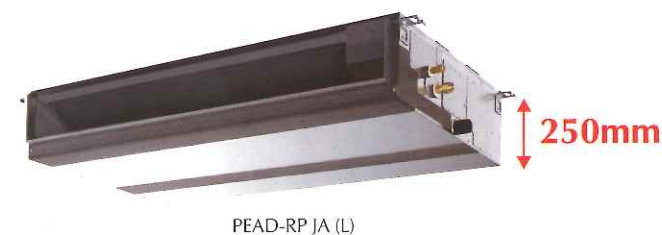

PEAD-RP JA (L)

Reduction of
75mm
(models 100-140)
compared to PEAD-EA

External Static Pressure

Five-stage external static pressure conversion is possible. Capable of being set to a maximum of 150Pa, units are applicable to a wide range of building types.

External static pressure setting

Series	35	50	60	71	100	125	140
PEAD-RP EA		30/70Pa			70/130 (with optional motor) Pa		
PEAD-RP GA	-	-		10/50/70Pa		-	-
PEAD-RP JA				35/50/70/100/150Pa			

External Static Pressure

The line-up consists of two types, models with or without a built-in drain pump.



PEAD-RP JA → Drain pump built-in



PEAD-RP JAL → No drain pump

*Units with an "L" included at the end of the model name are not equipped with a drain pump.


SEZ Series

Compact type fits neatly into lowered ceiling, achieving stringent economy in all aspects of air conditioning


Compact Ceiling Concealed Style

With our "ceiling concealed model," the air-conditioner unit itself is enclosed in the ceiling cavity, leaving only the outlet and inlet grille mounted on the ceiling surface. This greatly helps the air conditioning system to keep the quality of your interior decor. Unit size has also been made more compact than the previous model (SEZ-KA), slashing installation space and also facilitating concealed use in buildings where exposed format units have been the rule in the past.

[Dimension Comparison]

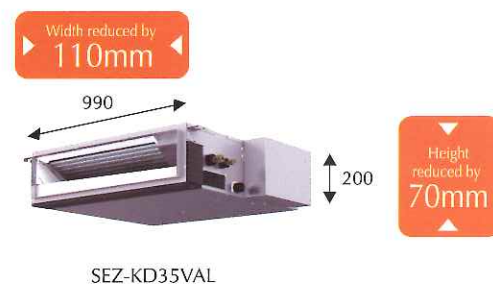

SEZ-KD35-71VAL

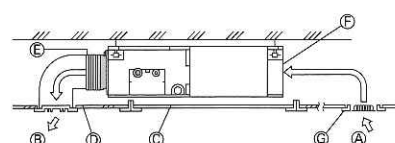

- Ⓐ Air inlet
- Ⓑ Air outlet
- Ⓒ Access door
- Ⓓ Ceiling surface
- Ⓔ Canvas duct
- Ⓕ Air filter
- Ⓖ Inlet grille



Wider Selection of Fan Speed and Static Pressure Level

Three fan speeds (Low-Mid-High) and four static pressure levels (5-15-35-50Pa) are available by using the DC fan motor to meet various applications needs.

	External Static Pressure (Pa)
SEZ-KA35-71VA	30/50Pa
SEZ-KD35-71VAL	5/15/35/50Pa

Four Levels Installation Possible for all Models

Drain Pump Equipping Possible (optional)

Our drain pump (PAC-KE07DM-E) has been added to the lineup as an optional part. Equipping this pump makes it possible to install drain hoses up to 550mm in length.

Mr.SLIM Inverter Single Split System



Our Inverter Technology adjusts capacity in response to conditions such as the difference between the outside and inside air temperatures, allowing our air conditioners to run more efficiently and reduce energy costs.

PLY Series

Indoor Unit



Dimensions (W x D x H): 840 X 840 X 258 mm

PLY-P18BA
Cooling capacity: 5.3kW

PLY-P24BA
Cooling capacity: 7.1kW



Dimensions (W x D x H): 840 X 840 X 298 mm

PLY-P30BA
Cooling capacity: 8.8kW

PLY-P36BA
Cooling capacity: 10.6kW



Mr Slim Inverter Ceiling Cassette Type PLY Series

Model						
Indoor		PLY-P18BA	PLY-P24BA	PLY-P30BA	PLY-P36BA	
Outdoor		SUY-KA18VA	SUY-KA24VA	SUY-KA30VA	SUY-KA36VA	
Function & type		Cooling, Ceiling Cassette				
Capacity (Min-Max)	kW	5.30 (2.8-5.4)	7.1 (3.6-8.9)	8.80 (4.1-9.7)	10.6 (4.1-10.7)	
Total power input	kW	1.47	2.02	2.36	3.13	
Starting current	A	6.17	8.44	9.44	12.51	
Running current	A	6.17	8.44	9.44	12.51	
Airflow (High)		CMM(m³/min)	12-13-14-16	14-16-18-20	20-22-25-28	24-26-29-32
Dimension (W x D x H)	Indoor	mm	840 X 840 X 258		840 X 840 X 298	
	Outdoor	mm	800 X 285 X 550		840 X 330 X 880	
Net weight	Indoor	kg	19	22	24	26
	Outdoor	kg	33	47	50	51
*Noise level (Low-High)	Indoor	dB(A)	28-29-30-32	28-30-32-34	33-35-38-41	37-39-41-44
Connection method		Indoor/Outdoor	Flared			
External Piping	Diameter	Gas (ø)	mm	12.70	15.88	
		Liquid (ø)	mm	6.35	9.52	
		Max. length	m	20	30	
		Max. height	m	12	15	
Power supply		V, Phase, Hz	230V, Single Phase, 50Hz			
Energy labelling scheme		   				

*Note: Noise level is measured in anechoic chambers.

Outdoor Unit



SUY-KA18VA
Dimensions (W x D x H): 800 X 285 X 550 mm



SUY-KA24/30/36VA
Dimensions (W x D x H): 840 X 330 X 850 mm



Conversion formula: Btu/h=kW x 3412

FEATURES

For your convenience, leave this flap extended to check features.

Energy Saving

-  **DC Inverter**  **Temperature Range Restriction**
-  **PAM Control**
-  **Econo Cool**
-  **New LEV Control**
-  **Fuzzy Logic "I Feel"**

Comfort

-  **The Quietest Air-Conditioner In The Market**
-  **Super Quiet**
-  **Quiet Operation**
-  **Powerful Cool**
-  **Wide Control**
-  **Long Air-flow**
-  **Auto Mode**
-  **Computerised Dehumidification**
Eliminate dampness for healthier and more comfortable air-conditioning, while enjoying great year-round economy.
-  **5 Step Vane Control & Swing Mode**
Five different airflow patterns & "Swing" mode match the interior layout and people in the room.

Fresh Air


-  **Anti-Allergy Enzyme Filter**
-  **Electrostatic Anti-allergy Enzyme Filter**
The filter is charged with static electricity, enable it to trap allergens such as molds and bacteria and decompose them using enzymes retained in the filter.
-  **Catechin Plus Pre-Filter**
-  **Double Air Cleaning Filter**
Traps dust and other small particles such as pollen, mould and dust mites which can cause allergic reactions. The filter removes particles as small as 0.01 microns.
-  **Nano Platinum Filter**
The filter has a large capture area and incorporates nanometre-sized platinum-ceramic particles that work to kill bacteria and deodorise the circulating air. Better dust collection than conventional filters is also ensured.

Convenience

-  **Operation Lock**
Prevent Operation settings from being changed.
-  **Multi-Language**
Control panel operation in eight different languages.
-  **24-Hour On/Off timer**
On/Off operation can be set simultaneously in 10-minute increment for a 24-hour period.
-  **Weekly Timer**
Easily set desired temperatures and operation start/stop times to match lifestyle patterns.
-  **Auto Restart**
This function permits automatic return to previous operation conditions after a sudden power black-out. You can now sleep peacefully all through the night without having to get up and turn your air-conditioner back on.
-  **Smart Control**
Press the same button twice in repetition to immediately return to the previous temperature setting.
-  **I Save Mode**
This is a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller.


Installation & Maintenance

-  **R410A Refrigerant**
The new HAB(hard alkyl benzene) refrigerant oil is a unique oil that degrades very slowly. In addition to this new oil, our exclusive cleaning-free technology incorporates a specially developed high-efficiency oil separator and heat exchangers that are optimally designed to prevent oil stagnation. These benefits make it possible to reuse existing piping even when installing a new model.
-  **Cleaning-Free, Pipe Reuse Technology**
Turning to our air-conditioner refrigerants, because the use of the Hydrochloro-fluorocarbon R22 is destructive to the ozone layer, we have switched to the new refrigerant R410A with zero ozone depletion potential.
-  **Easy Clean Design**
-  **Durable Electronic Metal Housing Box**
This special box protects the electronic circuitry from dust ensuring its reliable operation and preventing fire in the event of a short circuit.
-  **Anti-Rust Treatment**
-  **Emergency Circuit Protection**
In the event of sudden power surge, e.g. lightning, the circuits of 3 safety barriers (fuse, baristor, and surge absorber) are automatically broken first to protect the printed circuit board (PCB).
-  **Self-Diagnostic Function**
In the unlikely event of a malfunction, the LED on the indoor unit flashes to indicate the exact spot to be checked.



The best quality you can rely on.

Our quality assurance program guided by our stringent Quality Policy ensures confidence in all phases of the development process from design and manufacture, to the finished product.

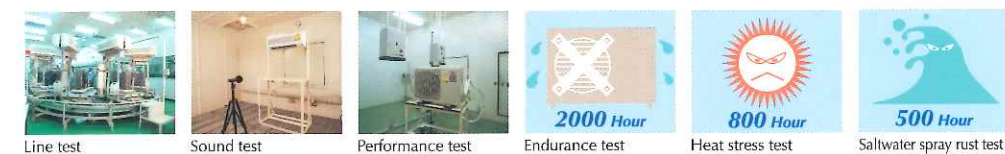

Technical assistance within 24 hours.

At Mitsubishi Electric, customers are our priority, which is why we provide attentive after-sales service to respond to your needs within 24 hours. Our service records show that upon receipt of a customer service request, more than 90% of them were completed on the same day, or the next working day. That's the kind of service you can look forward to. Because that's our way of thanking you for putting your trust in Mitsubishi Electric.

MITSUBISHI ELECTRIC ASIA PTE LTD

307 Alexandra Road, #05-01/02, Mitsubishi Electric Building, Singapore 159943

TEL: (65) 6473 2308 FAX: (65) 6476 0590


Office Hours: Monday - Friday 8:30am - 5:30pm

Show Room Opening Hours:

Monday-Friday 8:30am - 5:30pm

Saturday & Sunday 10:00am - 6:00pm

Closed on Public Holidays Tel: (65) 6470 2600

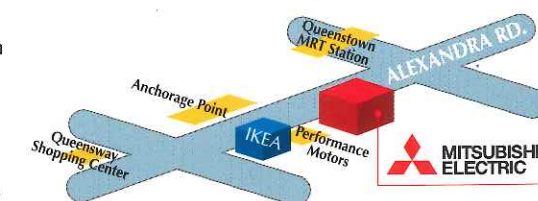

Note

- Rating conditions: Cooling - Indoor: 27°C DB / 19°C WB; Outdoor: 35°C DB.
- Refrigerant piping length (one way): 5 meters / indoor unit (inverter)
- Due to the compact high efficient design of heat exchanger, the use of wall mounted fan coil units are not recommended for hair saloon environment. Please contact our Dealers for recommendations of appropriate models.
- Guaranteed operating range.